

Tiger Canyon i3 - Board

A leap forward in Business Performance

Boundary-breaking performance is available with the latest 11th Gen Intel[®] Core[™] i3 processors with UHD graphics and support for high-speed 3200 MHz DDR4 memory. Whether you're creating a digital kiosk, deploying intelligent vending, or refreshing enterprise PCs, Tiger Canyon can get the job done easily. Tiger Canyon SKUs also feature technology hardware-enhanced security features, and platform stability to help businesses cut IT costs and boost uptime.

More Performance. More Connections

Every Intel NUC 11 Pro system can support one 8K or four 4K displays for digital signage, video conferencing, and other deployments. Businesses can get more work done anytime,

anyplace, with the latest wired and wireless options, like Intel[®] Wi-Fi 6 AX201, the fastest generation of Wi-Fi, and two ultra-fast Thunderbolt[™] ports.

Build embedded solutions



Tiger Canyon, built on Intel 11th Gen architecture, provides greater system performance over previous generations with advanced hyperthreading technologies driving faster speeds and enhanced graphics. Qualified for 24x7 operation and backed by a three-year warranty, Intel NUC 11 Pro boards are small, powerful systems designed to meet today's needs—and keep businesses running for years. The built-in hardware-enhanced security means you can keep client data and credentials secure is perfect for installations such as digital kiosks and intelligent vending.

Highlighted features

- 11th Gen Intel[®] Core[™] i3-1115G4
- Intel[®] UHD Graphics
- Two DDR4-3200 SO-DIMM Sockets
- M.2 Socket Supports PCIe Gen 4 SSDs
- M.2 Socket Supports SATA SSDs
- M.2 Socket Supports Wi-Fi
- Two HDMI 2.0b Supporting 4K @ 60Hz
- Intel[®] 2.5 Gigabit LAN
- One Thunderbolt 4 Port
- One Thunderbolt 3 Port
- Three USB 3.2 Gen 2 Ports
- One USB 2.0 Port
- Digital Audio 7.1 Surround Sound
- TPM 2.0

Customization

- Supports DDR4 RAM 4GB-64GB
- Primary M.2 22x80 SSD 128GB-8TB
- Secondary M.2 22x42 Supports SSD 128GB-8TB
- One M.2 22x30 Supports Wi-Fi Module
- Two USB 2.0 Internal Headers
- One RS-232 Serial Internal Header

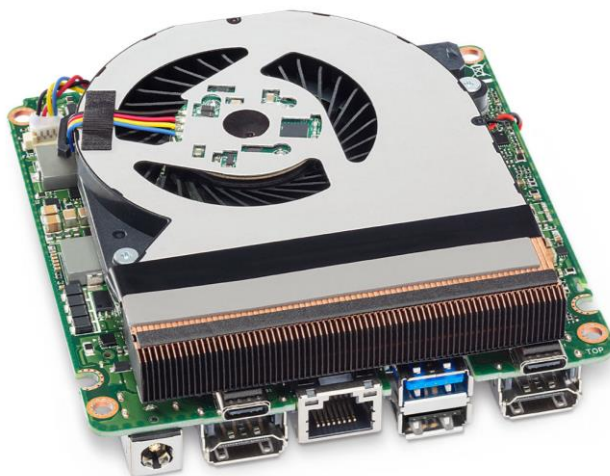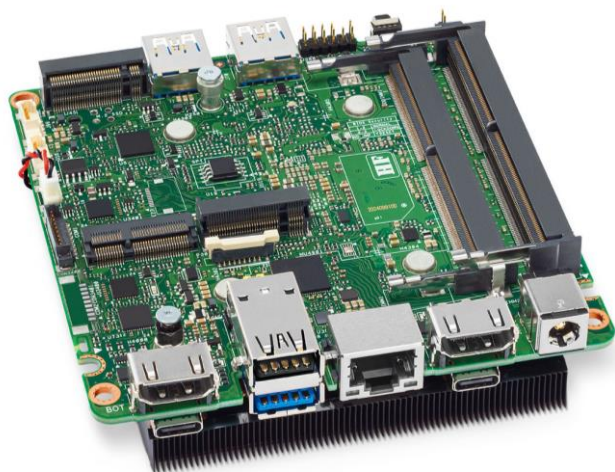

Simply NUC Services

You can order this NUC in your various configurations, as well as your corporate OS Image loaded and ready to deploy.

Technical Specifications

<p>Processors</p> <ul style="list-style-type: none"> • 11th Gen Intel® Core™ i3-1115G4 processor (1.7Ghz@28W, up to 3Ghz Turbo, 2 Cores, 4 Threads, 6MB Cache) 	<p>Graphics</p> <ul style="list-style-type: none"> • Intel® UHD Graphics • Two HDMI 2.0b Ports with HDCP 2.2 • Built-in CEC for Both Ports • Support for a 3rd and 4th Monitor via Thunderbolt 4 with DisplayPort 	<p>System Memory</p> <ul style="list-style-type: none"> • Two DDR4 SO-DIMM sockets, 64GB Max, 3200Mhz, 1.2V
<p>Storage Capabilities</p> <ul style="list-style-type: none"> • Primary M.2 22x80 Socket Supports M.2 SSDs, PCIe Gen 4 • Secondary M.2 22x42 Socket Supports SATA SSD 	<p>Peripheral Connectivity</p> <ul style="list-style-type: none"> • Intel® 2.5 Gigabit LAN • Three Super-Speed USB 3.2 Gen 2 Ports (Two Front and One Rear) • One Rear USB 2.0 Port • Two Rear USB 3.2 Gen 2 Ports on Type-C Connector (One Thunderbolt 4; One Thunderbolt 3) • One 22X30 M.2 Socket Supporting Wi-Fi Modules 	<p>System Bios</p> <ul style="list-style-type: none"> • 64 Mb Flash EEPROM with Intel® Platform Innovation Framework for EFI Plug and Play • Intel® Visual BIOS • Intel® Express BIOS Update Support
<p>Audio</p> <ul style="list-style-type: none"> • Up to 7.1 Multichannel (or Dual 8-channel) Digital Audio via HDMI 	<p>Baseboard Power Requirements</p> <ul style="list-style-type: none"> • 19V, AC-DC Power Adapter with Detachable Power Cord <p>Board Dimensions</p> <ul style="list-style-type: none"> • 4.09" x 4.01" • 104mm x 102mm 	<p>Front Panel Header</p> <ul style="list-style-type: none"> • Vcc5/1A, 5Vsby2A, 3.3Vsby1A
<p>Hardware Management Features</p> <ul style="list-style-type: none"> • Voltage and Temperature Sensing • ACPI-compliant Power Management Control • Processor Fan Speed Control • Fan Sensor Inputs used to Monitor Fan Activity 	<p>EMC/RF Regulations and Standards (Class B)</p> <ul style="list-style-type: none"> • FCC CFR Title 47, Chapter I, Part 15, Subparts B, C, E • CISPR 52 • ICES-005 • EN 55052 • EN 55024 • ETSI EN 500 528 • ETSI EN 501 489-1 • ETSI EN 501 489-17 • ETSI EN 501 895 • EN 62511 • AS/NZS 2772.2 • AS/NZS 4268 • VCCI V-2, V-5, V-4 • KN-52 • KN-24 • CNS 15458 	<p>Expansion Capabilities</p> <ul style="list-style-type: none"> • Two USB 2.0 Ports on Two 1x4 Internal Headers • Two Consumer Electronics Control Headers

Certification and Regulations

<p>Product Safety Regulations and Standards</p> <ul style="list-style-type: none"> • IEC 60950-1 • UL 60950-1 • EN 60950-1 • CAN/CSA-C22.2 No. 60950-1 	<p>Environmental Regulations</p> <ul style="list-style-type: none"> • RoHS Directive 2011/65/EU • WEEE Directive 2012/19/EU • China RoHS <p>Certified Operating Systems</p> <ul style="list-style-type: none"> • Windows 10 64-bit (Pro & Home) • Windows 10 IoT • Windows Server 2019 • Linux (Fedora)
<p>Environment Operating Temp</p> <ul style="list-style-type: none"> • 0° C to +40° C • Non-Condensing Humidity 	